

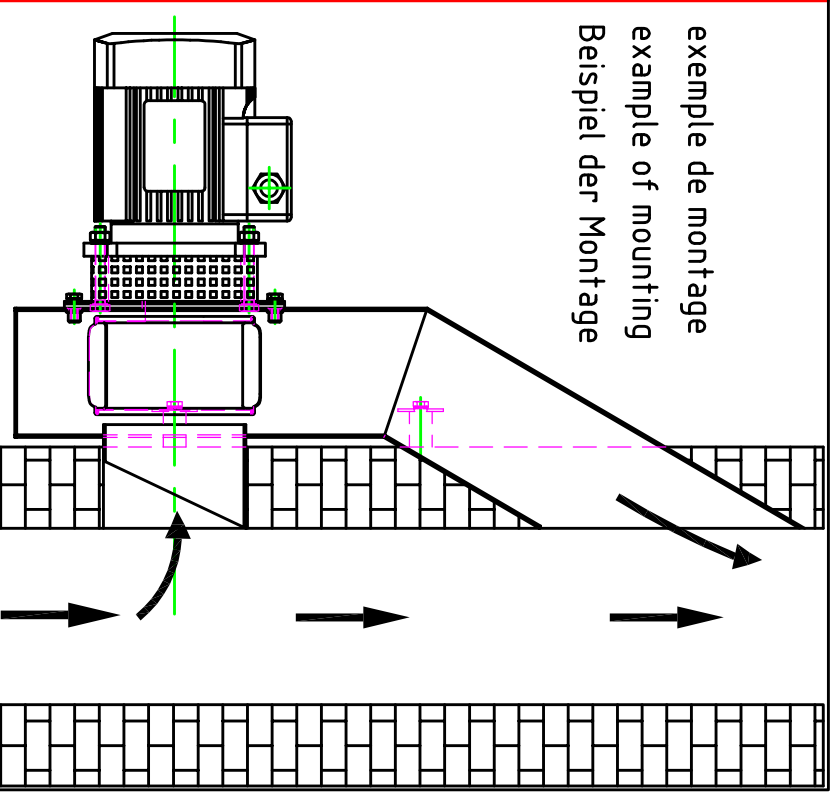
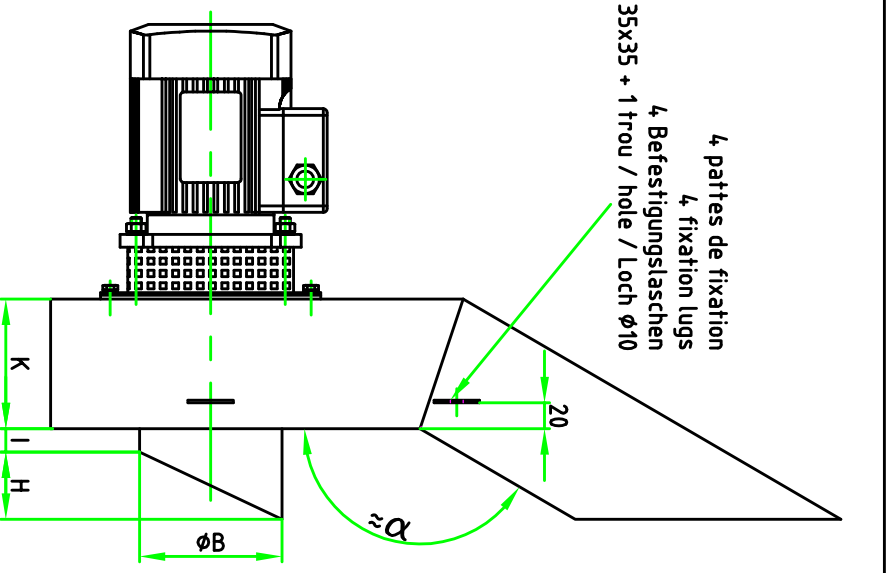


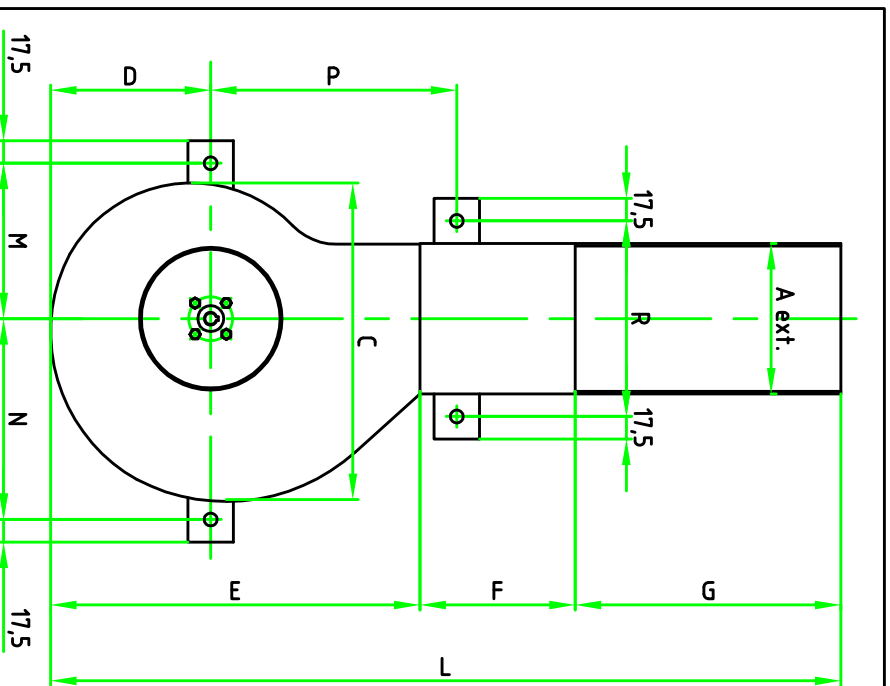

TYPE / TYP	A	B	C	D	E	F	G	H	I	K	L	M	N	P	R	α
EFC 133	116	110	246	123,5	285	120	205	70	18	100	610	120	155	190	151	150°
TUE 133x76																
EFC 160	116	140	246	123,5	285	190	205	90	20	100	680	120	155	190	151	150°
TUE 160x76																
EFC 190	142	140	300	150	352	167	220	95	25	120	740	145	190	250	177	14,5°
TUE 190x96																
EFC 240	195	200	374	190	443	227	320	90	50	180	990	185	225	290	230	150°
TUE 240x142																
EFC 275	213	228	409	206	430	400	490	114	28	170	1320	195	250	300	248	160°
TUE 275x142																

masse weight	gewicht	TYPE	ouverture maxi du foyer maximum opening of the fire place maximum öfning vom Feuerherd	débit air delivery Luftstrom	puissance moteur/vitesse motor/speed Motor
11kg	11kg	EFC 133	0,50m ²	300 m ³ /h	120W
12kg	12kg	EFC 160	0,90m ²	600 m ³ /h	120W
14kg	14kg	EFC 190	1,25m ²	800 m ³ /h	1500Tmn / rpm
23kg	23kg	EFC 240	2m ²	1200 m ³ /h	120W
31kg	31kg	EFC 275	3m ²	1800 m ³ /h	250W

siège : 5-7 Av. Ferdinand buisson 75016 PARIS - Tél : 0146203720 - Fax : 0146203413 - Site : www.airrap.fr - email : sparis@airap.fr

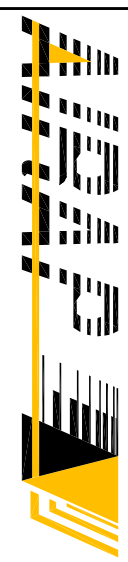

VENTILATEUR CENTRIFUGE / CENTRIFUGAL FAN / RADIAL VENTILATOR
EXTRACTEUR DE FUMÉE / SMOKE EXHAUSTER / RAUCHABSAUGER
TYPE / TYP : EFC

Plan DAO n° 1
21324
A3