


MODELE	DIAMETRE DE CONDUIT Ø mm	DEBIT MAX M3/h	PRESSION MAX mm H2O	TENSION A 50HZ Mono V	INTENSITE NOMINALE A	PUISSANCE W	VITESSE Tr/mn	PRESSION SONORE (à 3 m) dB (A)	DEGRE DE PROTECTION	TEMP. max °C
AXC 100A	100	237	28	230	0.13	70	1990	30	IPX4	60
AXC 100B	100	260	38	230	0.23	70	2530	36	IPX4	60
AXC 125A	125	287	24	230	0.13	70	1700	32	IPX4	60
AXC 125B	125	313	34	230	0.23	70	2400	36	IPX4	60
AXC 150A	150	337	19	230	0.14	70	2470	33	IPX4	60
AXC 150B	150	537	40	230	0.37	80	2450	39	IPX4	60
AXC 160A	160	366	20	230	0.14	70	2395	31	IPX4	60
AXC 160B	160	754	47	230	0.50	110	2550	38	IPX4	60
AXC 200	200	887	46	230	0.50	80	2450	34	IPX4	60
AXC 250	250	1114	54	230	0.65	170	2550	43	IPX4	60
AXC 315	315	1439	74	230	1.14	150	2645	43	IPX4	60
AXC 355A	355	2200	35	230	1,12	240	1330	57	IPX4	60
AXC 355B	355	2350	90	230	2,82	650	2560	77	IPX4	60

NOTA - ErP conforme à la directive 2009/125/CE et UE 1253/2014
- Volute peinture epoxy – moteur avec roulements

Installations

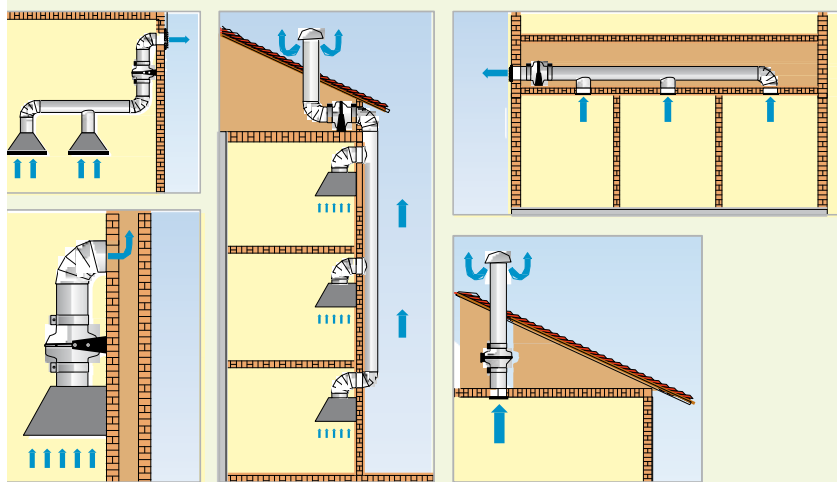

TYPE	A	B	C	Ø D	Ø d	E	Kg
AXC 100 A	12	215	24	245	98	38	3
AXC 100 B	12	215	24	245	98	38	3
AXC 125 A	11	214	24	245	122	38	3
AXC 125 B	11	214	24	245	122	38	3
AXC 150 A	21	216	23	245	147	38	3
AXC 150 B	22	230	22	333	148	38	5
AXC 160 A	24	215	24	245	157	38	3
AXC 160 B	21	230	22	333	158	38	5
AXC 200	22	230	27	333	198	38	5
AXC 250	22	230	35	333	248	38	5
AXC 315	30	297	52	404	314	38	8
AXC 355 A	44	400	50	484	355	38	12
AXC 355 B	44	400	50	484	355	38	14

