



Inlet flexible connection Flexibler Stutzen Etritt Manchette souple à l'aspiration

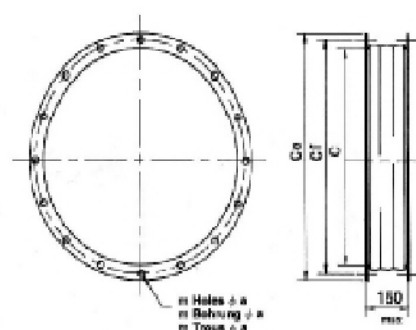


Grandezza Size Baugröße Taille	C	Ce	Cf	m	Øa
40	150	210	184	8	11
45	170	230	204	8	11
50	190	250	224	8	11
56	200	280	234	8	11
63	245	305	279	8	11
71	264	324	298	8	11
80	296	356	330	8	11

Outlet flexible connection Flexibler Stutzen Austritt Manchette souple au refoulement

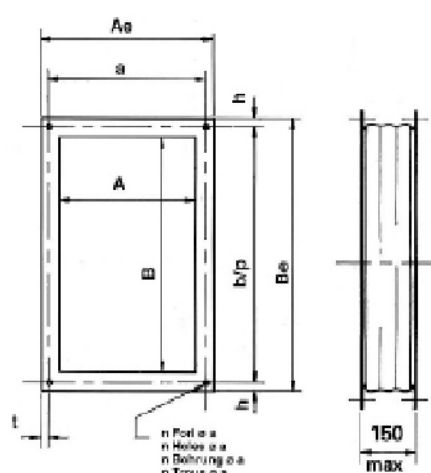

Grandezza Size Baugröße Taille	A	B	Aa	Bb	a	b	p	h	t	n	Øa
40	72	86	132	146	102	1	116	15	15	4	11
45	80	95	140	156	110	1	126	15	15	4	11
50	90	107	160	167	120	1	137	15	15	4	11
56	100	118	180	178	130	1	148	15	15	4	11
63	115	140	175	200	145	1	170	15	15	4	15
71	125	150	205	230	165	1	190	20	20	4	15
80	142	173	222	253	182	2	206.5	20	20	6	15

Rubber anti-vibrations mounting Gummischwingungsdämpfer Plots antivibratoires en caoutchouc

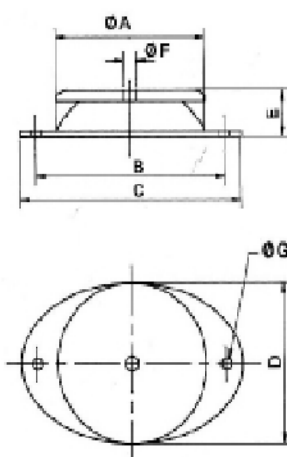

Tipo Type Typ Type	ØA	ØF	ØG	B	C	D	E
CH 60	60	M6	8.2	76	90	60	24
CH 80	80	M8	8.2	100	120	80	27
CH 100	100	M10	10.2	124	148	100	28

Grandezza Size Baugröße Taille	Tabella selezione ammortizzatori in gomma - Selection table for rubber anti-vibration mounting Gummischwingungsdämpfer Auswahltable - Tableau de choix plots antivibratoires en caoutchouc			
	5 SISW	4 SISW	9 SISW	12 SISW
40	Q.18 Stk	Q.17 Q.16	4	6
	Tipo Type	CH 60	CH 60	CH 60
45	Q.18 Stk	Q.17 Q.16	4	6
	Tipo Type	CH 60	CH 60	CH 60
50	Q.18 Stk	Q.17 Q.16	4	6
	Tipo Type	CH 60	CH 60	CH 80
56	Q.18 Stk	Q.17 Q.16	-	6
	Tipo Type	-	CH 60	CH 80
63	Q.18 Stk	Q.17 Q.16	-	6
	Tipo Type	-	CH 80	CH 100
71	Q.18 Stk	Q.17 Q.16	-	6
	Tipo Type	-	CH 100	CH 100
80	Q.18 Stk	Q.17 Q.16	-	6
	Tipo Type	-	CH 100	CH 100